

HSF





SPECIFICATION

Current Rating: 3.0 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T,UL 94V-0 Black



Ordering Code:

FHEM01 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
② No. of Contacts
01 To 40
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
S:Single
⑤ Plastic High:
H:8.5
Please mark the desired length in the H
- ⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

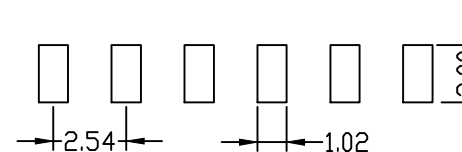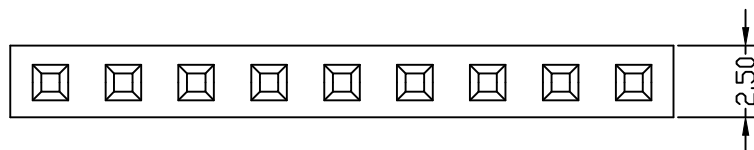

PCB LAYOUT

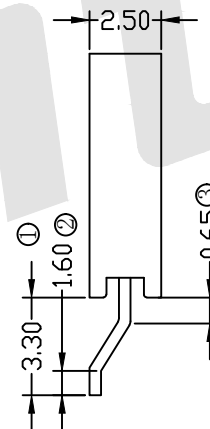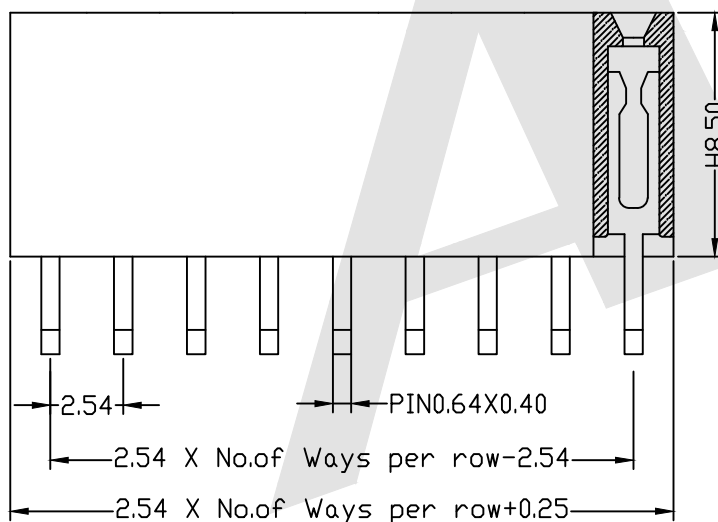

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW YG ZHONG DATE 01/05/2016
CHECK BobYang DATE 01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.54mm Female Header Single Row Angle SMT Type H:8.5

DRAWING NO: FHEM01-XXSXXX

PRODUCT NO: FHEM01-XXSXXX

REV1 ③0.89mm revise to 0.65mm
①3.40mm revise to 3.30mm ②0.85mm revise to 1.60mm

19/04/2019

DESCRIPTION

DATE