

HSF



SPECIFICATION

Current Rating:	3.0 Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

PCB LAYOUT

Ordering Code:

PC104E07 - X - X - D - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
20

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
D: Dual

⑤ Plastic High:

H:19.5

Please mark the desired length in the H

⑥ Insulator Material

A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑦ Packing

A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15


SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com





TITLE: 2.54mm Female Header +Add Plastic 2x10P
Straight Type H=19.5

DRAWING NO: PC104E07-XXDXXX

PRODUCT NO: PC104E07-XXDXXX



3rd ANGLE PROJECTION

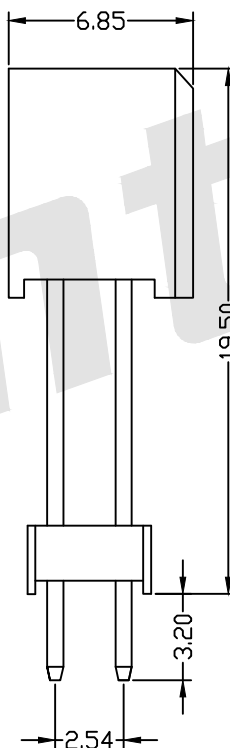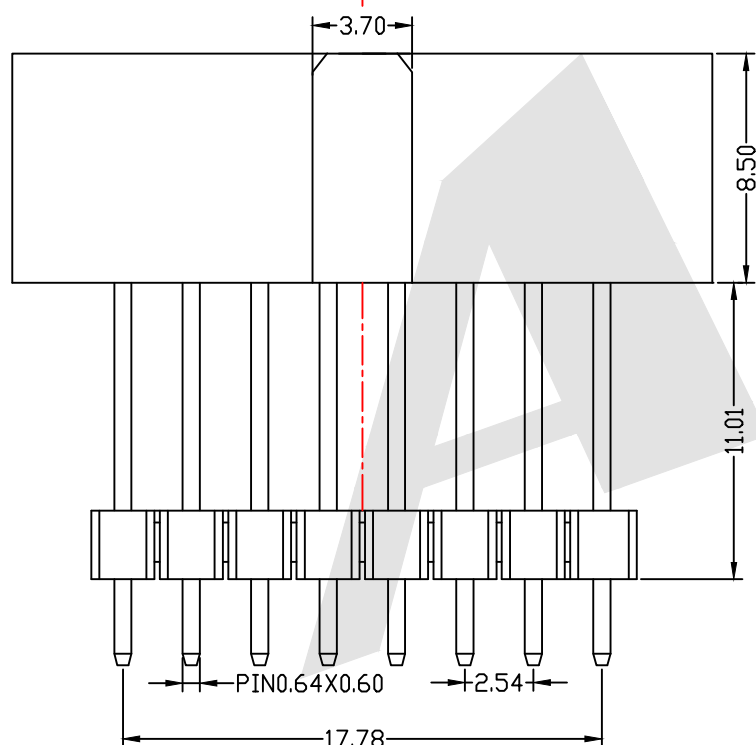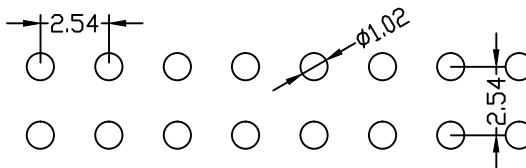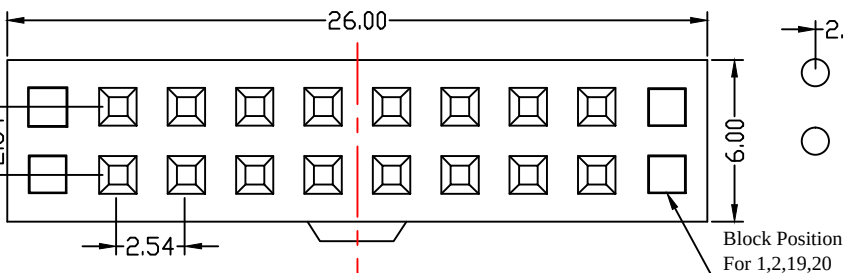

REV DESCRIPTION

DATE